


# K4-21.0KW

## Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled brushless generator
- +/- 1% Solid-state voltage regulation
- Low 1,800 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Tinned wiring
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Stainless Steel exhaust elbow cast
- Gear-driven raw water pump
- 4-Point isolation mounts S/S
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Spin-on lube filter
- Secondary 5 Micron fuel filter
- Self-bleed fuel system
- USCG approved fuel lines
- Electric fuel transfer pump
- Forged brass oil drain valve with safety lock
- Awl-Craft 2000 urethane finish
- Circuit breaker - main line
- Belt guard
- 5-Year Limited Warranty

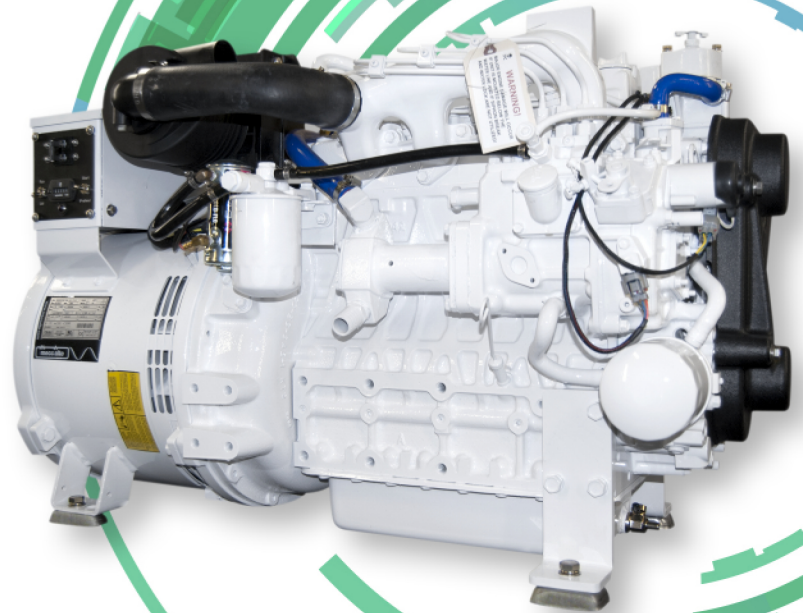

## Specifications

**Kubota Model** V2403-M-E4BG

**Cylinders** 4

**Cu. In. Displacement** 148.5

**Bore x Stroke** 3.43 x 3.64 (in.)

**Dims (LxWxH)** 39.5 x 21 x 26 (in.)

**Enclosure Dims (LxWxH)** 43 x 24 x 28 (in.)

**Weight (lbs.)** 776

**Output (volts)** 120/240

**Output (amps)** 175/87.5

**Output (watts)** 21,000

**Exhaust Dia.** 2 in.

**Raw water Dia.** 1 in.

**Fuel Line Dia.** 5/16 in.

**Return Line Dia.** 3/16 in.

*Specifications are subject to change without notice*

## Optional Equipment

- Start / Stop - 20 ft. harness
- Custom remote engine / generator instrument panels
- DC Gauge panel - 20 ft. harness
- Stainless Steel drip pan
- Three phase generator output
- 24 Volt starting system
- 50 cycle output
- Dedicated motor starting generator windings
- Sound insulation blanket
- Powder coated aluminum enclosure
- Remote oil filter kits
- Custom chrome packages
- Spare parts kit