

POWER & CONTROL

SEASTAR ADAPTIVE TRIM TAB SYSTEM

Intuitive control provides accurate position feedback and complete connectivity with shift and throttle controls on the public NMEA network providing a superior boating experience

INNOVATIVE RUGGED DESIGN
INCREASED RELIABILITY

INTUITIVE DIAL CONTROLLER
EASY USER INTERFACE

INTEGRATED SYSTEM
INTEGRATES WITH N2K



Mobile living made easy.

 **DOMETIC** **OUTDOOR**

INTELLIGENT DESIGN FOR INTUITIVE CONTROL



Adaptive Actuator

- Sealed and potted wiring and electronics
- Built-in power electronics, position sensing and CAN communication
- High torque DC Motor
- Rugged & stylish housing
- Planetary gearbox and inverted lead-screw design provides ultra-efficient and reliable high load transfer and quiet operation
- Dual housing seals
- Scratch resistant ground and chromed solid actuation shaft
- Rear seal in protected bushing area
- Wiper removes particles from shaft and protects rear seal
- Thrust bearings fore and aft provide efficient, high load capability in extension and retraction

Smart Integration With Engine Manufactures Shift And Throttle Controls

The adaptive trim tab system integrates with the 3rd party electronic shift and throttle controls over the public N2K network to give the following functions:

- Hole shot mode, tabs will automatically fully extend at takeoff and adjust to get the boat on plane quickly
- Tabs move to favorite position once set RPM or speed are achieved for optimum ride performance
- When throttle goes into reverse, tabs automatically fully retract for safety and control
- System setup can be intuitively done using the adaptive dial controller or the CANtrak display
- 2nd station is an easy addition

ALL ELECTRIC DESIGN REDUCES COMPLEXITY AND INCREASES RELIABILITY.



Trim Tabs

- Heavy duty 12 GA 304 stainless steel plate, electro polished
- Trim tab kits contain marine grade stainless steel 316 fasteners
- Thick 1/4" hinge pin to eliminate tab warping
- Heavy duty 14 GA stainless steel hinge to ensure robust tab performance
- Custom tabs available (volume required)
- Available in a variety of standard and edge mount sizes

Adaptive Dial Controller




- LEDs accurately indicate Trim Tab positions
- Turn dial manually to level boat as conditions change
- Each button push lowers bow in precise increments
Hold button to lower bow quickly
- Multi-color LEDs indicate power and status of Trim Tab system
User adjustable LED brightness
- Quickly move tabs to fully retracted home position
- Enable automatic Hole Shot feature that helps to plane the boat faster and limit bow rise
- Automatically learns and moves your tabs to your favorite tab position during cruising
- Program your favorite position manually, and push button to quickly move the boat to the preferred position
- Each button push raises bow in precise increments
Hold button to raise bow quickly
- Adjustable pitch and roll control sensitivity

ADAPTIVE TRIM TAB SCHEMATIC

Get the ultimate boating experience with a truly connected boat where the Trim Tabs receive inputs from shift and throttle controls.

- * Wiring diagram for reference only.
- * Sold as a system.

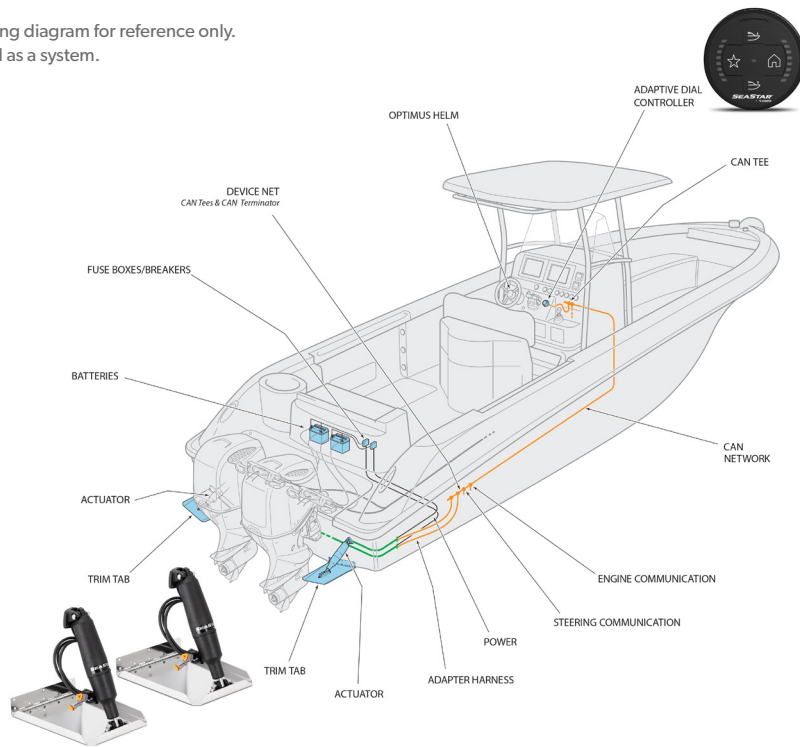

Trim tab position can be displayed on capable MFD's

SPECIFICATIONS	SUMMARY
Stroke length	2.25" and 4.25"
Positional accuracy	+/- 0.050"
Operating voltage	9-16 VDC (SAE J1455)
Max Push/Pull Load Capability	1000 lbs
Impact Resistance	50G in Z-axis (ABYC P-27 / IEC60068)
Operating temperature	-18 to 77 C (ISO 25197)
Storage temperature	-40 to 85 C (ISO 25197)
Actuator power consumption under typical load	120 W (10 A)
Actuator water ingress protection	IP66M, IP68M, IP69K (High Pressure Wash Down)
Dial controller water ingress protection	IP56
Connections to tab actuator	3pin Deutsch for CAN 2pin Deutsch for power (Pos & Neg)
Dial controller	Private CAN network, 250 kbps (SAE J1939), position LED indicators Public CAN network
Regulatory	American Boat and Yacht Council (ABYC) European Union (EU) recreational craft directive 2013/53/EU (replacing 94/25/EC) CE,
Trim tabs	304 stainless steel, 12 gauge, electro-polished, and custom sizes/designs available with volume
Note: Subject to change	

Adaptive Trim Tab System Includes:
 (Qty 2x Actuators, Controller, Harnesses, 2x Stainless Tabs, Mounting Hardware)

DOMETIC SKU	PART NO	DESCRIPTION
9610002729	ATT4103	Kit, 2.25" Stroke 11.5" P-P Adaptive Actuator And Controller, 9x12 Standard Mount, Electro Polished
9610002730	ATT4105	Kit, 2.25" Stroke 11.5" P-P Adaptive Actuator And Controller, 12x12 Standard Mount, Electro Polished
9610003560	ATT4107	Kit, 2.25" Stroke 11.5" P-P Adaptive Actuator And Controller, 12x9 Standard Mount, Electro Polished
9610002731	ATT4205	Kit, 2.25" Stroke 11.5" P-P Adaptive Actuator And Controller, 12x12 Edge Mount, Electro Polished
9610003602	ATT4203	Kit, 2.25" Stroke 11.5" P-P Adaptive Actuator And Controller, 9x12 Edge Mount, Electro Polished
9610002732	ATT4207	Kit, 2.25" Stroke 11.5" P-P Adaptive Actuator And Controller, 12x9 Edge Mount, Electro Polished
9610002733	ATT4131	Kit, 2.25" Stroke, Adaptive Actuator And Controller, 9x12 Standard Mount, Electro Polished, Short Actuator 10" P-P
9610002734	ATT4133	Kit, 2.25" Stroke, Adaptive Actuator And Controller, 12x12 Standard Mount, Electro Polished, Short Actuator 10" P-P
9610002735	ATT4231	Kit, 2.25" Stroke, Adaptive Actuator And Controller, 12x12 Edge Mount, Electro Polished, Short Actuator 10" P-P
9610002736	ATT4233	Kit, 2.25" Stroke, Adaptive Actuator And Controller, 12x9 Edge Mount, Electro Polished, Short Actuator 10" P-P
9610002959	ATT4601	Kit, 2.25" Stroke 11.5" P-P Adaptive Actuator And Controller, Plus All The Components Minus The Tabs
9610002997	ATT4701	Kit, 4.25" Stroke 13" P-P Adaptive Actuator And Controller, Plus All The Components Minus The Tabs

P-P = Pin to pin distance retracted
 Stroke = The distance the shaft extracts
 9x12 = 9 is the chord length and 12 is the hinge width